

Installation Instructions

Lacombe Circular Chandelier

Important Safety Instructions

- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.

To Assemble

1. Install the beveled mounting disc to the J-box using the supplied machine screw hardware (2X).

2. Feed the electrical wires through the all thread. Then, attach the all-thread to the main body using the carabiner and slide the drop rod over it, flush with the main body.

3. There should be 1/2" of all thread above the tubing cover. If not, loosen the set screw and adjust. Secure the all thread by tightening the lock washer and nut.

4. Slide the canopy onto the all thread until flush with the tubing cover. Tighten the provided lock washer and nut to make a secure connection.

5. Connect the wires from the chandelier to those from the J-Box using the Wago wire connectors.

6. Push the ceiling plate over the mounting disc, flush with the ceiling and tighten with the provided lock washer (2X) and nut (2X). Cover with the finial (2X).

7. Screw in the bulbs (12X). ***DO NOT OVER TIGHTEN THE BULB***


8. For easier installation, assemble the glass panels on a table before attaching to the fixture. Starting with the inside top row, position a top glass panel (92X) between the hanger front (184X) and hanger back (138X). Insert spacers (92X) as shown in the diagram and secure using the machine screws (368X). Repeat this process for the bottom row using the bottom glass panels (92X) before moving to the outer layer.

9. Turn on the power to confirm you have made good wire connections.

Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

*We recommend installation by a licensed electrician

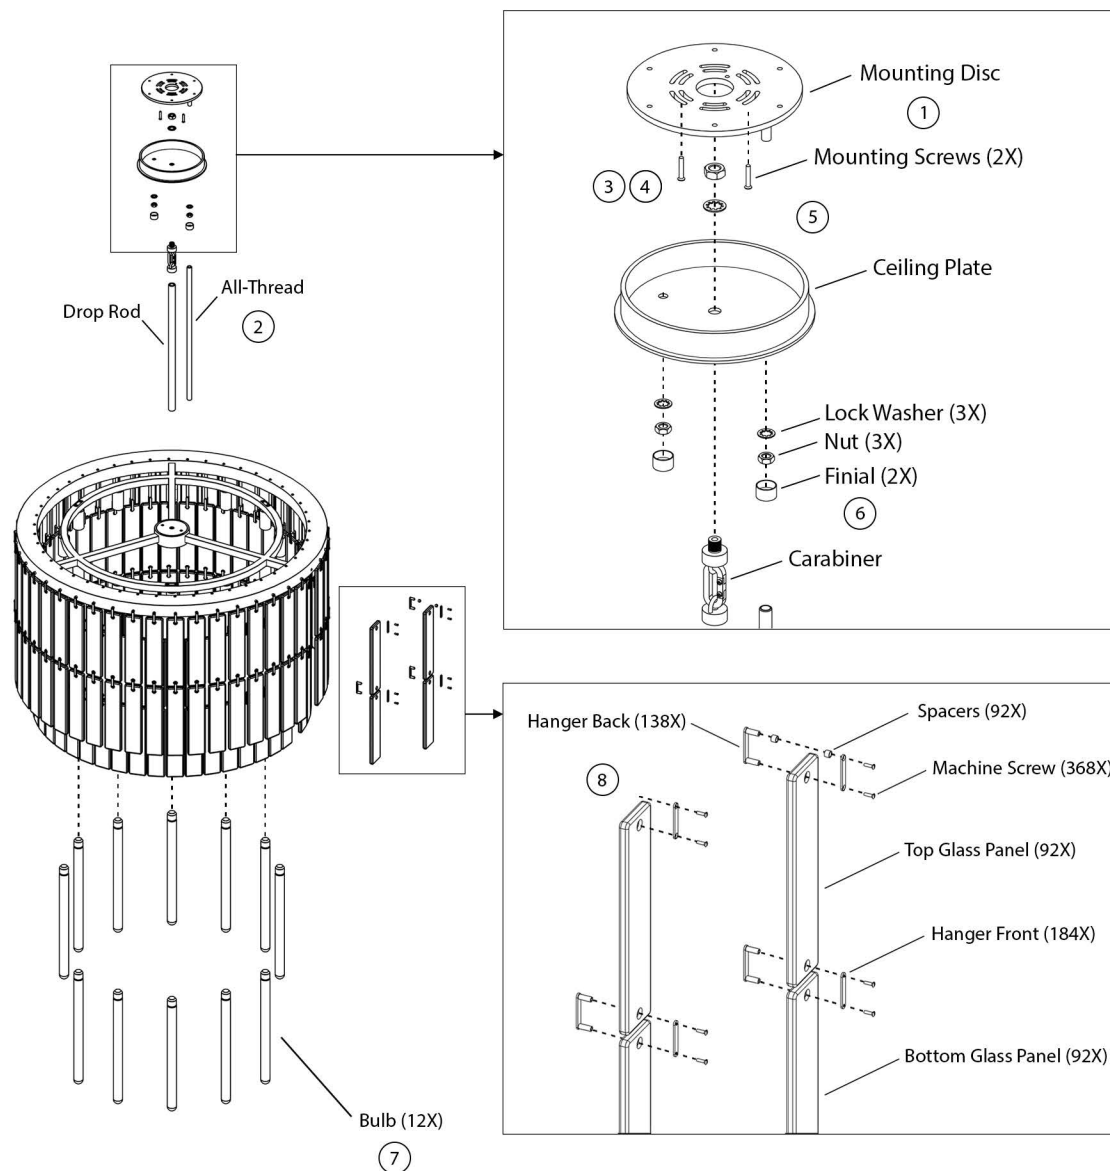

Electrical: 12 x E26 5W T9L LED bulb only