

# Installation Instructions

## Le Petit Lacquemart Circular Chandelier

### Important Safety Instructions

- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.

### To Assemble

1. Attach the mounting disc to the J-box using the supplied mounting screw hardware (2X) and hang the canopy using the carabiners (2X). Additional holes have been added to the mounting disc and must be used for additional mounting points into the ceiling material (additional hardware not provided), depending on various ceiling construction, anchors or blocking may be required.

2. Lift the fixture straight out of the box and directly to the ceiling to avoid the steel cables from coming in contact with the ceiling plate, as it will scratch. Temporarily hang the fixture using the supplied carabiners (2x).

3. Connect the wires from the chandelier to those from the J-Box using the Wago wire connectors.

4. Push the ceiling plate over the mounting disc, flush with the ceiling and tighten the set screws (3X) using the supplied allen key.

5. We recommend wearing the supplied gloves to protect the glass at this point of the installation. Start by installing the innermost double shades (8X). It is recommended that the glass be installed on the shade holders before installing on the fixture. Once assembled, thread the connector hanging on the steel cable into the top of the shade holder. Repeat until the inner row is complete.

Next, install the outer layer by alternating between double shades (10X) and single shades (10X).


6. Screw in the bulbs (6X) \*DO NOT OVER TIGHTEN THE BULBS\*

7. Turn on the power and check that good connections have been made.

### Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

\*We recommend installation by a licensed electrician

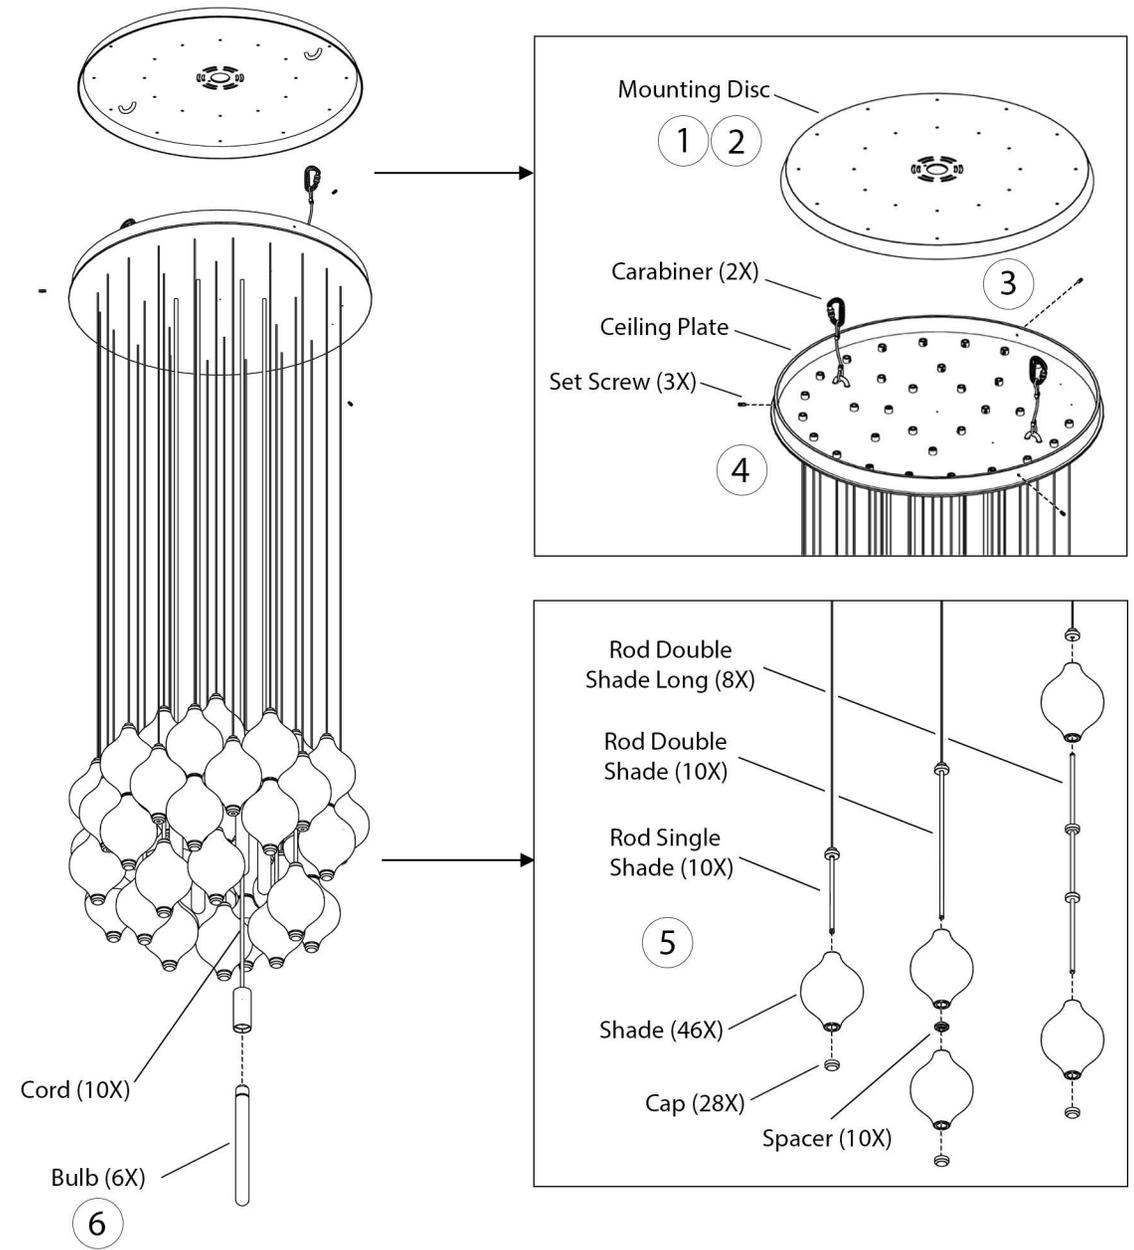

Electrical: 6 x E26 5W T9L LED bulb only