

Installation Instructions

Araignee 12 Light Chandelier

Important Safety Instructions




- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.

To Assemble

1. Attach the mounting disc to the J-box using the supplied mounting screw hardware (2X). Additional holes are added to the mounting disc to allow for extra mounting screw hardware (not provided), depending on various ceiling constructions. Anchors or ceiling blocking strongly advised. The position of the mounting disc will dictate the rotational direction of the chandelier. Be aware of the cord holes on the ceiling plate to the finial locations before installing the mount to the ceiling.

2. Connect the wires from the chandelier to those from the J-Box using the Wago wire connectors.

3. Push the ceiling plate over the mounting disc, flush with the ceiling and tighten the provided lock washer and nut to make a secure connection.

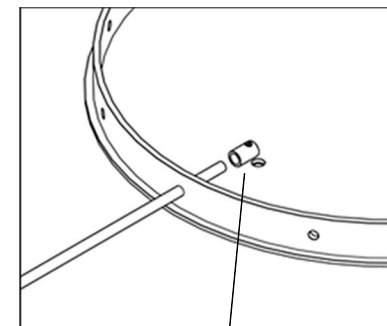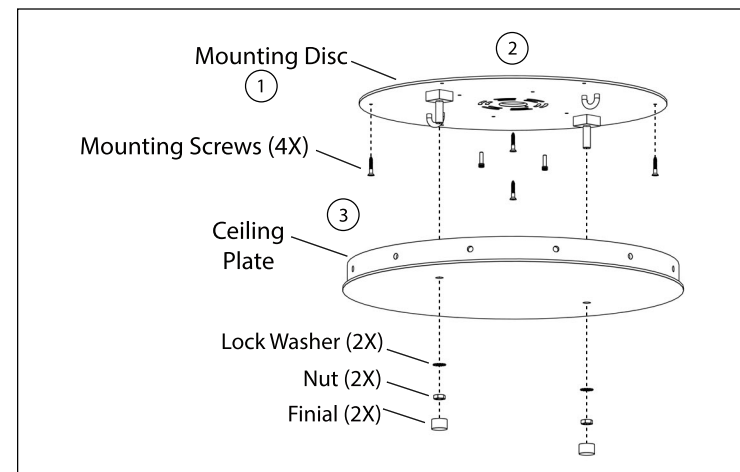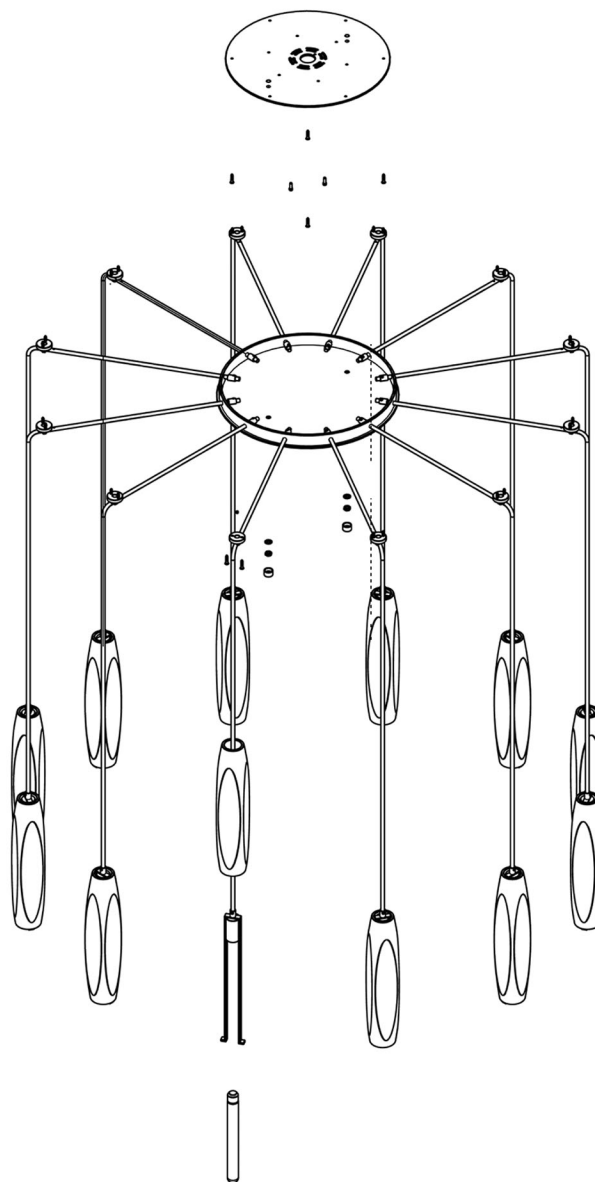

Strain Relief Cap (12X)

Installation Instructions

Araignee 12 Light Chandelier

4. Mark out all mounting points at your desired locations. For our standard 60" arrangement, follow the diagram below. Before anchoring the eyelets, ensure that the nylon set screws (12X) are fully secured. Install each pendant by installing the eyelets to the ceiling using the provided finish-matched wood screws (24X). Additional anchors or blocking may be required based on ceiling type.

5. Gently squeeze the shade bracket to allow the bracket to pass through the interior of the shade until the foot of the bracket is below the crystal.

DO NOT LET GO OF THE SHADE UNTIL THE BULB IS INSTALLED

6. Slide the shade up along the cord and screw in the bulbs (12X).

DO NOT OVER TIGHTEN THE BULBS

7. Slide the shade down into place. Ensure the bracket ledge sits beneath the shade to securely hold it in place.

8. Turn on the power and check that good connections have been made.

Do not leave the crystal hanging without the bulb installed at any given time. When changing the bulb, make sure to hold the crystal, so it can not fall.

Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

