Installation Instructions

Lacombe Linear Chandelier

Important Safety Instructions

• Turn off all power to the Junction Box before making any electrical adjustments.
• Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
• To avoid the risk of fire, do not exceed the recommended wattage.
• Consult a qualified, licensed electrician before installation.

To Assemble

1. Install the mounting plate to the J-box using the supplied machine screw hardware (2X). Additional holes have been added to the mounting plate and must be used for additional mounting points into the ceiling material (additional hardware not provided), depending on various ceiling construction, anchors or blocking may be required.

2. Feed the electrical wires through the all thread. Attach the all-thread to the main body and slide the drop rod over it, flush with the main body (2X). There should be 1/2" of all thread above the tubing cover. If not, loosen the set screw and adjust. Add the carabiner assemblies to the top of both rods with the exposed all thread (2X). Insert the threaded stud on the top of each carabiner through the matching canopy hole. Secure each stud using the provided lock washer (2X) and nut (2X).

3. Connect the wires from the chandelier to those from the J-Box using the Wago wire connectors.

4. Push the ceiling plate over the mounting plate, flush with the ceiling and tighten with the provided lock washer (2X) and nut (2X). Cover with the finial (2X).

5. Screw in the bulbs (7X). *DO NOT OVER TIGHTEN THE BULB*

6. Starting with the inner row, position a top glass panel (136X) between the hanger front (272X) and hanger back (204X). Secure using the machine screws (84X). Move to the outer row and position a top glass panel (136X) between the hanger front (272X) and hanger back (204X). Insert spacers (136X) as shown in the diagram and secure using the machine screws (544X).


7. Align the drop hangers (68X) into the groves on the body and secure with a washer (68X) and machine screw (68X).


8. Turn on the power to confirm you have made good wire conections.


Care Instructions


• Wipe with a soft cloth. Do not use chemical cleaner.

*We recommend installation by a licensed electrician

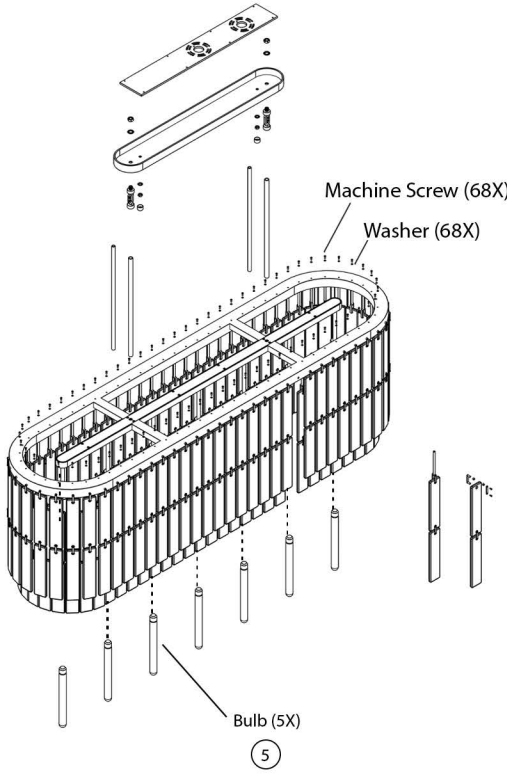

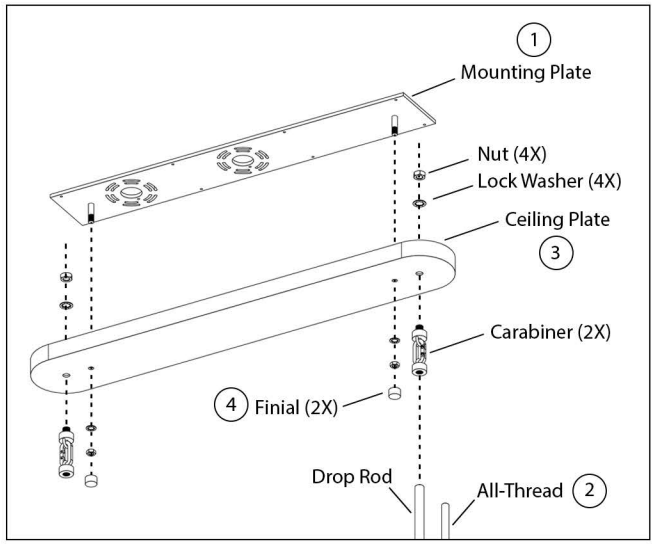

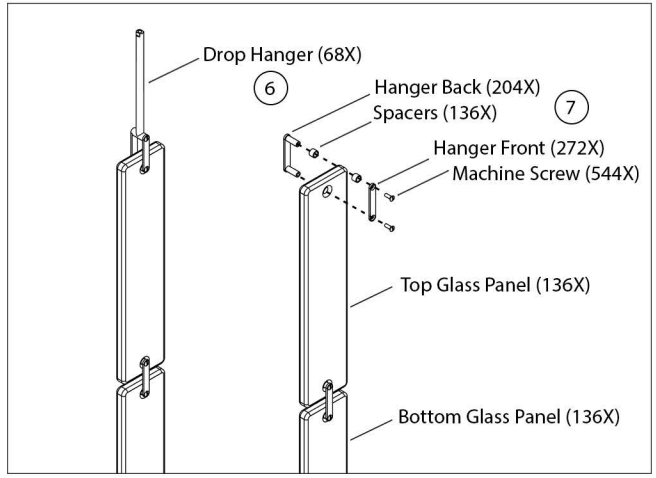



Electrical: 7 x E26 5W T9L LED bulb only