

# Installation Instructions

## Apollinaire Linear Chandelier

### Important Safety Instructions

- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.


### To Assemble

1. Install the beveled Mounting Plate to the ceiling using the supplied machine Screw Hardware. Additional holes are added to the Mounting Plate to allow for extra mounting hardware (not provided), depending on various ceiling constructions. Anchors or ceiling blocking is strongly advised.
2. Feed the electrical wires through one of the Drop Rods while inserting the threaded connectors (2X) and drop rods (2X) into the Main Body.
3. Insert the threaded connectors (2X) into the Drop Rods and through the Ceiling Plate.
4. Fasten each nut and washer (2X) over the threaded connectors to secure the fixture to the ceiling plate.
5. Hold the chandelier near the ceiling and connect the wires from the chandelier to those in the Junction Box using the supplied wire nuts.
6. Push the Ceiling Plate over the Mounting Plate flush with the ceiling and tighten all 6 set screws.
7. Push the glass up with your hand to screw in the bulb easily. \*DO NOT OVER TIGHTEN THE BULBS\*
8. Turn on the power and check that good connections have been made.

### Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

\*We recommend installation performed by a licensed electrician

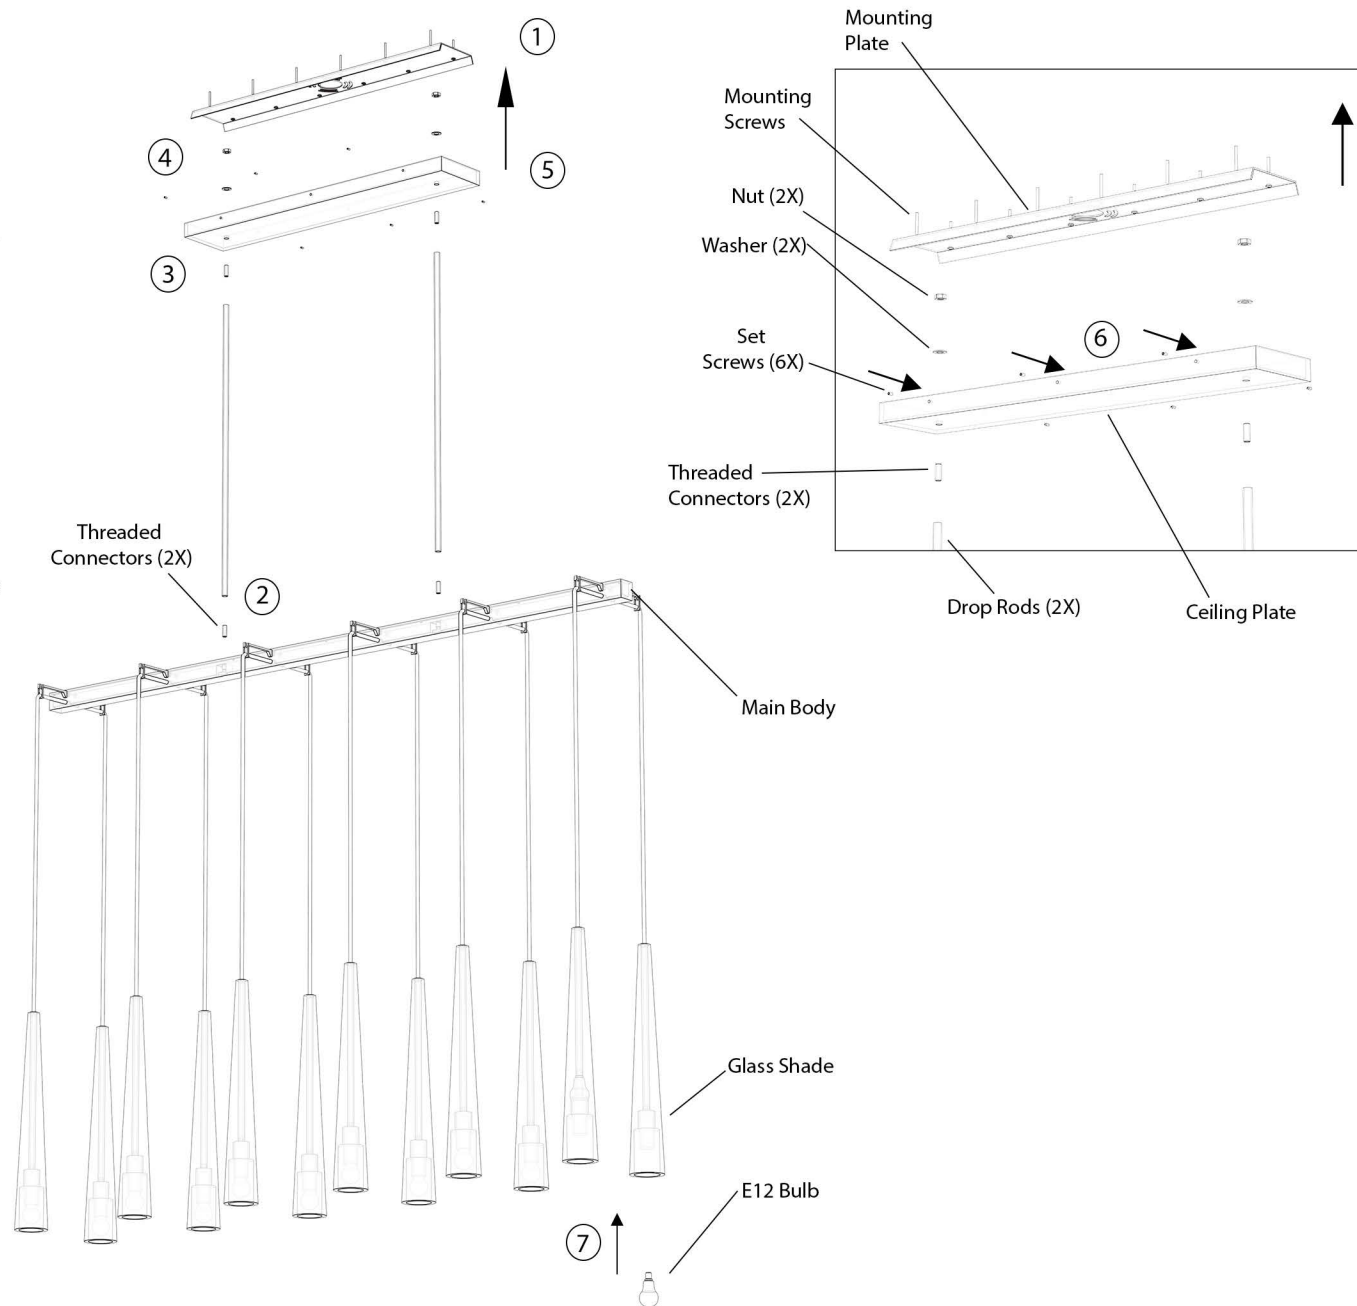

Electrical: 12 X E12 5W LED Bulb Only