

# Installation Instructions

Dessay Pendant

## Important Safety Instructions

- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.


## To Assemble

1. Install the beveled mounting disc to the J-box using the supplied machine screw hardware (2X).
2. Feed the electrical wires through the all thread. Then, attach the all-thread to the main body and secure it using the set screw (1X). Slide the drop rod over the all thread.
3. Slide the canopy onto the all thread until flush with the drop rod. There should be 1/2" of all thread above the drop rod. If not, loosen the set screw and adjust. Tighten the provided lock washer and nut to make a secure connection.
4. Connect the wires from the chandelier to those from the J-Box using the Wago wire connectors.
5. Push the ceiling plate over the mounting disc, flush with the ceiling and tighten the set screws (3X) using the supplied allen key.
6. Screw in the bulb (4X).
- \*DO NOT OVER TIGHTEN THE BULBS\*
7. Slide the shade (4X) up around the socket arm, then lower it into the bottom slot. Align the two top holes. Secure each shade with the provided thumb screws (2x per shade). Do this for the 3 remaining shades.
8. Turn on the power to confirm you have made good wire connections.

## Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

\*We recommend installation by a licensed electrician

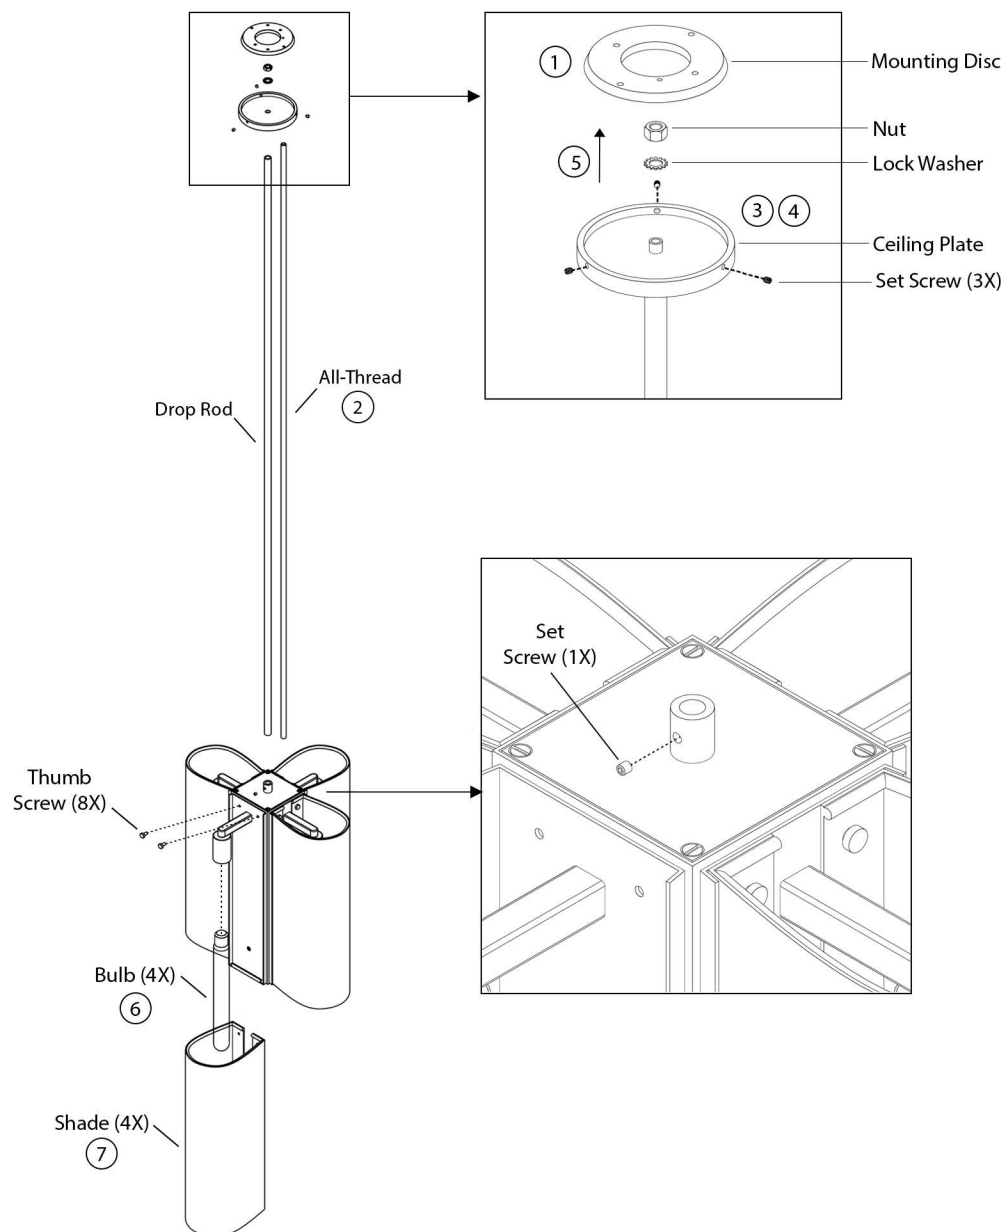

Electrical: 4 x E26 4W LED bulb only