

Installation Instructions

Villiers Flush Mount

Important Safety Instructions

- Turn off all power to the Junction Box before making any electrical adjustments.
- Always disconnect the power before installing/replacing bulbs, during cleaning or maintenance.
- To avoid the risk of fire, do not exceed the recommended wattage.
- Consult a qualified, licensed electrician before installation.


To Assemble

1. Using the supplied wire nuts, connect the wires from the fixture to those in the J-box.
2. Align the mounting plate to your preference in the ceiling and install it in the Junction Box using the supplied mounting screw hardware (6x). Additional holes are added to the mounting plate to allow for extra mounting hardware (not provided), depending on various ceiling constructions. Anchors or ceiling blocking is strongly advised.
3. Align the studs (4x) on the mounting plate to the ceiling plate holes for the studs. Slide the ceiling plate over the mounting plate and tightly secure the ceiling plate using finials (4X).
4. Install 4x bulb by screwing it into the sockets.
DO NOT OVERTIGHTEN
5. Secure the textured glass panel (textured surface facing inwards) onto the ceiling plate by the thumb screws (2x) as shown. Panels need to hang freely. Do not overtighten the thumb screws.
6. Repeat step 4 for the remaining 7x textured glass panels.
7. Align and slide the bottom textured glass panel (textured surface facing inwards) over the socket platform and secure using the cap.
8. Turn on the power and check that good connections have been made.

Care Instructions

- Wipe with a soft cloth. Do not use chemical cleaner.

*We recommend installation performed by a licensed electrician

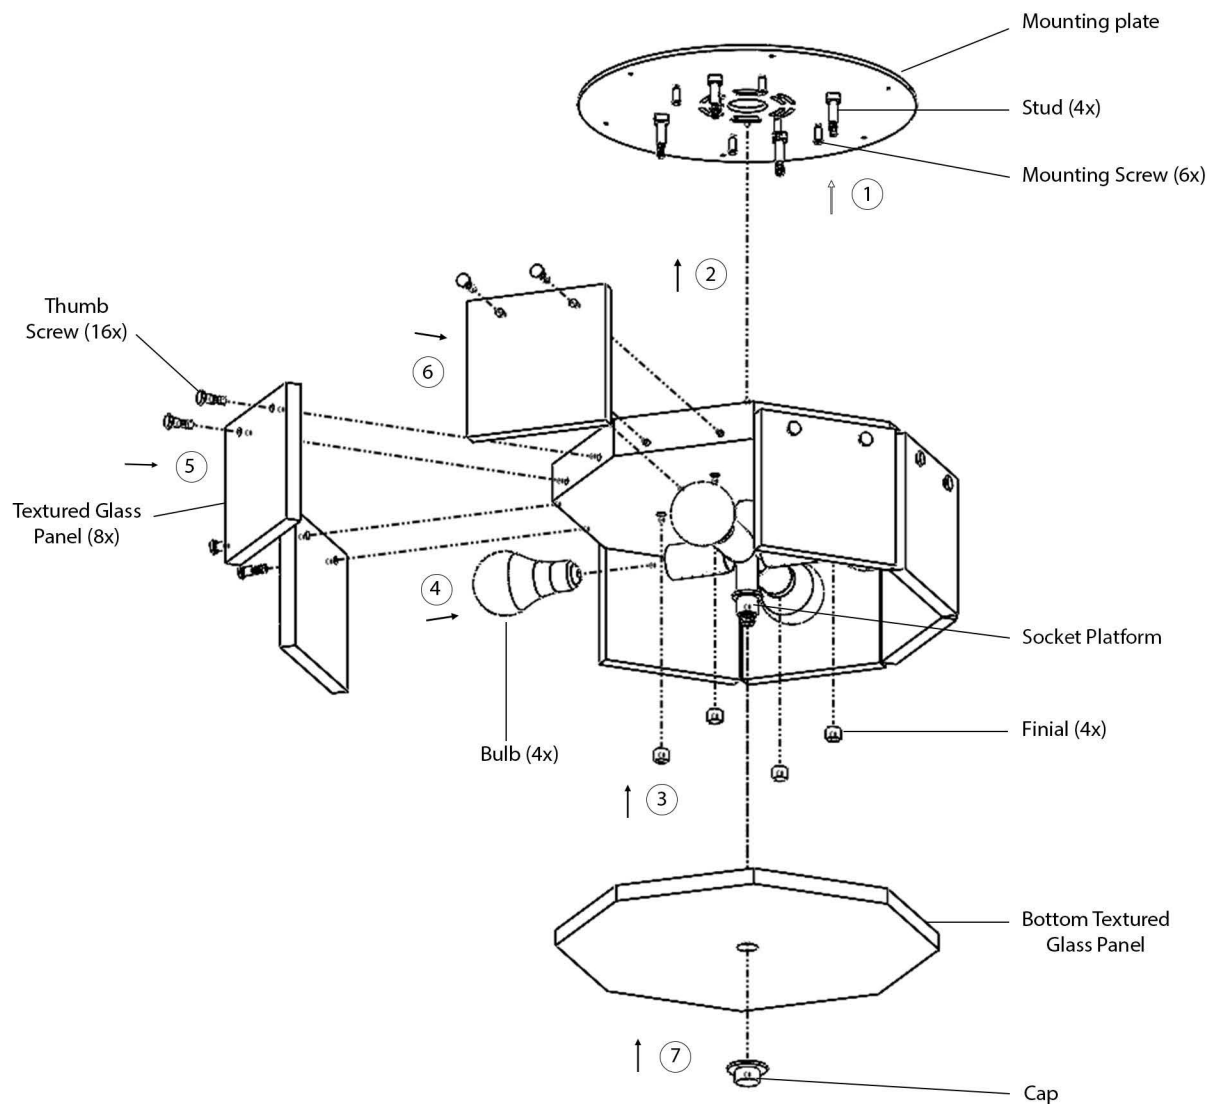

Electrical: 4X E26 7W LED bulb only